

- ◆ Combines or Splits Tx and Rx Signals for 2100 Band Systems
- ◆ Guaranteed Low PIM
- ◆ High Isolation
- ◆ Low Insertion Loss
- ◆ Up to 80W power on Tx
- ◆ RoHS Compliant



**BL-36N**



	Model/Connector	
	N (f)	7-16 (f)
2100 Duplexer Filter	<b>BL-36N</b>	<b>BL-36D</b>
Add 'P' to model number for Outdoor Finish		

Microlab Duplexer, BL-36 series allows low cost effective combination and separation of the Tx and Rx signals in the 2100 band used in EMEA & APAC.


Isolation from the Tx signals into the Rx band are greater than 50dB, while the less important Rx signals into the Tx band are greater than 35dB.

Units use a suspended substrate design for lower cost, while providing adequate isolation, low PIM and low insertion loss for most applications. Attention to mechanical design, ensures low loss, and high reliability.

For outdoor environment models order BL-36NP or BL-36DP.

Tx Passband:	2110-2170 MHz (Tx Port)
Rx Passband:	1920-1980 MHz (Rx Port)
Insertion Loss:	1.2 dB max
Passband Ripple:	0.7 dB max
Input Isolation:	>50dB (from Tx into Rx band) >35dB (from Rx into Tx band)
Return Loss, all ports:	18 dB min.
DC Continuity:	Between All Ports
PIM (Intermod):	<-153 dBc (measured in Rx Block using two +43 dBm tones in Tx Block)
Power Rating:	80W avg. (Tx Port) 40W avg. (Rx Port)
Impedance:	50Ω nominal
Environment:	-30°C to +80°C, IP64
Finish: Connectors:	Triplated
Housing Finish:	
Indoor/IP64:	Standard model, Passivated Al.
Outdoor/IP67:	Painted, Add P to Model No.
Weight, nom:	2.0 lb., 0.9 kg

### Mechanical Outline

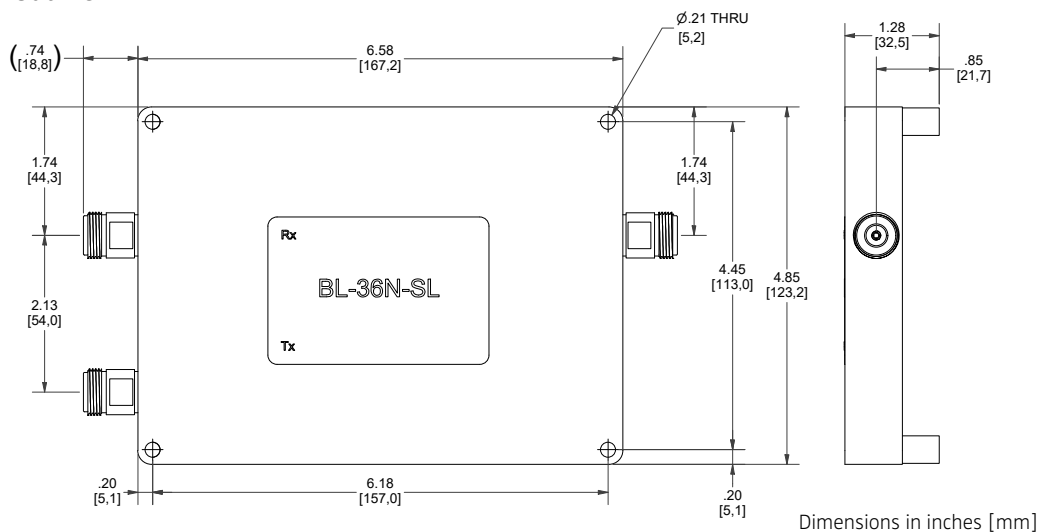

**Note: Specifications are subject to change without prior notification.**

9JUN2020