

- ◆ Hi/Lo Combiner
- ◆ Minimal RF Insertion Loss
- ◆ 46 dB Input Isolation
- ◆ 100W per port
- ◆ IP67 Rated
- ◆ N-type Connectors
- ◆ RoHS Compliant




Microlab BK-2006N diplexer allows combination and separation of the signals in 400-600 MHz and 800-1000 MHz wireless bands. The inputs are isolated and have minimal insertion loss over their respective frequency bands to minimize band inter-reaction. The unit is painted and rated for IP67 for outdoor applications.

Frequency Bands:

Port 1:	400-600 MHz
Port 2:	800-1000 MHz
Return Loss:	19 dB min.
Isolation:	46 dB min.
Insertion Loss:	0.55 dB max.
Power:	100W avg. per port
Impedance:	50Ω nom.
Environment:	-45° to +70°C, IP67
Connectors:	N (f), Flanged
Dimensions:	4.57 x 4.17 x 1.18 in [116 x 106 x 30 mm]
Weight, nom:	1.7 lbs (0.79 kg)

Mechanical Outline

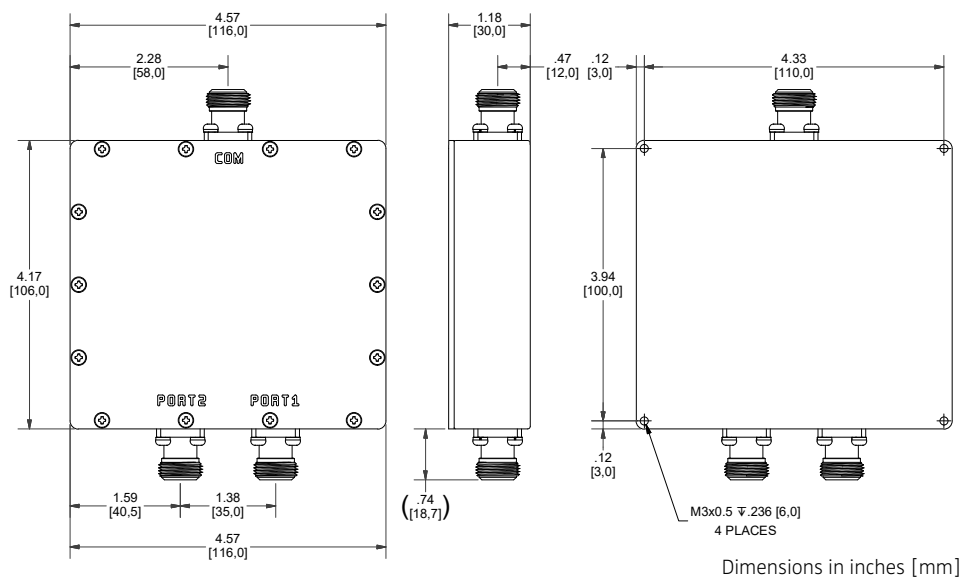

Note: Specifications are subject to change without prior notification.

3NOV2021