

The MCC200-503 filter module is available for C-Band & 3.45GHz applications combining 600-700/850/PCS/AWS/5G NR n77 Bands. The filter module is low-loss and IP67 rated for outdoor applications.

Port 1 covers 600-700MHz and supports single and dual-band radios. Port 5 offers support for full 5G NR n77, which covers current Licensed C-Band, 3.45GHz, & CBRS as well as support for future n77 applications.

The MCC200 is available in either a 6RU rack-mount enclosure or compact wall-mount sub-rack. The rack-mount option accommodates up to (8) filter combiner modules. The wall-mount sub-rack offers 4-slots plus an integrated Ultra-Wideband 4x4 combiner.




Specification	MCC200-503
Card Type	Pentaplexer
Frequency (MHz)	600-700: 617-798 850: 817-894 PCS: 1850-2000 AWS: 1695-1780 & 2110-2200 5G NR n77: 3300-4200
Insertion Loss	<0.3dB (typ), <0.4 dB (max)
Isolation	>45dB (typ), >40 dB (min)
Return Loss	>20 dB (617-2200), >17.8dB (3300-4200)
Impedance	50Ω
PIM	<-160 dbc (-117 dBm) (Test with 2x +43dBm tones @ Ambient)
Group Delay (ns)	600-700: 33, 850: 40 AWS: 18, PCS: 29, n77: 6
Power/Input	40 W avg
Weight, lb (kg)	8.7 (3.95)
Connector	4.3-10 (f), long-neck
Environment	-25°C to +65°C
Ingress Protection	IP67
Dimensions	10.35 x 8.89 x 2.15 in [263 x 226 x 54.6 mm]
Optional Wallmount Brackets (Kit Sold Separately)	MCC200-500-BKT

Note: Specifications are subject to change without prior notification.

05JUN2023

MCC200-503 Outline

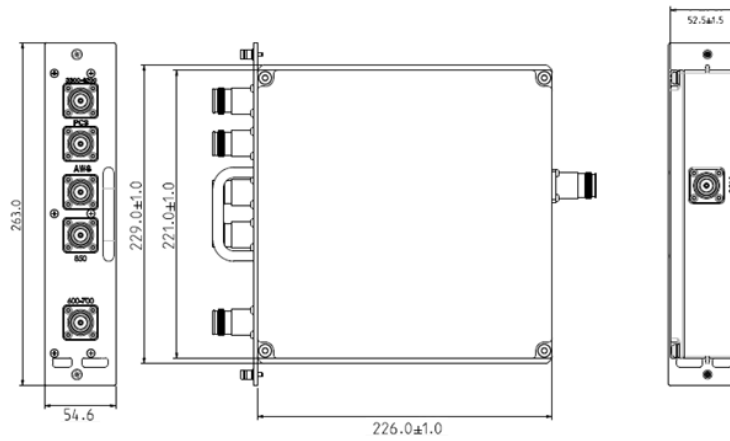

Dimensions in inches [mm]



**The trusted solution for mobile network operators
and neutral host network providers.**

Note: Specifications are subject to change without prior notification.

Microlab, A Division of RF Industries, 25 Eastmans Road, Parsippany, NJ 07054

Tel: (862) 328-1101 • sales@microlabtech.com • www.microlabtech.com