



DCC503 HPOI


DCR Broadband Base Unit

Microlab DCC503 Series is a High Power Point of Interface (HPOI) Module that operates over the 850 MHz cellular band. The HPOI is used with the DAS Control Rack (DCR) to monitor and control power levels in the DAS head end. The HPOI separates the duplexed signals from the base station and attenuates the high powered signal to a level acceptable to the DCR.

Microlab DCC Series® products are built on a common platform that provides a high level of customization for your particular application. The HPOI Trays are available in different input power ranges to accommodate different BTS transmit powers. Connector types and locations make it convenient for installation. Microlab has developed a wide variety of standard HPOIs, which can quickly be installed in conjunction with a standard DCR into the perfect custom monitor and/or attenuation system solution. Rack mid-mount kit and flexible SMA cables to connect the HPOI to the DCR included.

HPOI MODELS* (Other Band and Band Combinations are available)					Common Specifications	
Power Input Tx	850 MHz	Insertion Loss Tx	EIA Rack Height	PIM Test Power Levels	Frequency Band	
60 W	DCC503-A48[C/D/E] [B/F]	3.1 dB	2 RU	2 x 43 dBm	850 MHz Band (2 ports)	Tx: 869-896 MHz Rx: 824-851 MHz
5 W	DCC503-A37[C/D/E] [B/F]	2.1 dB	2 RU	2 x 34 dBm	Rx Insertion Loss	2 dB
*Add BTS connector designator to end of model #: C for 4.1-9.5 DIN, D for 7-16 DIN, E for 4.3-10 Location of BTS connector is designated by B for back or F for front panel					Tx Isolation (Tx/RX)	>60 dB
DCR Models					PIM (Intermod)	
Description					2 x +43 dBm tones:	<-154 dBc, -156 dBc typ
DCC500-A01	4 channel low power Active DAS tray with power monitoring and attenuation control, 110-250 VAC power supply.	2 x +34 dBm tones:		<-145 dBc, -147 dBc typ	Impedance	50 Ω nominal
DCC500-B01	4 channel low power Active DAS tray with power monitoring and attenuation control, -48/+24 VDC power supply	Connector Type	Input:	4.1-9.5, 7-16 or 4.3-10	Environment	0-50 °C / 32-131°F
DCC550-A01	12 channel power monitoring only DAS Tray	Output:		SMA	Size	19" W x 17" D
DCC560-A01	4 channel attenuation control only DAS Tray					

Application of DCC503 in DAS:

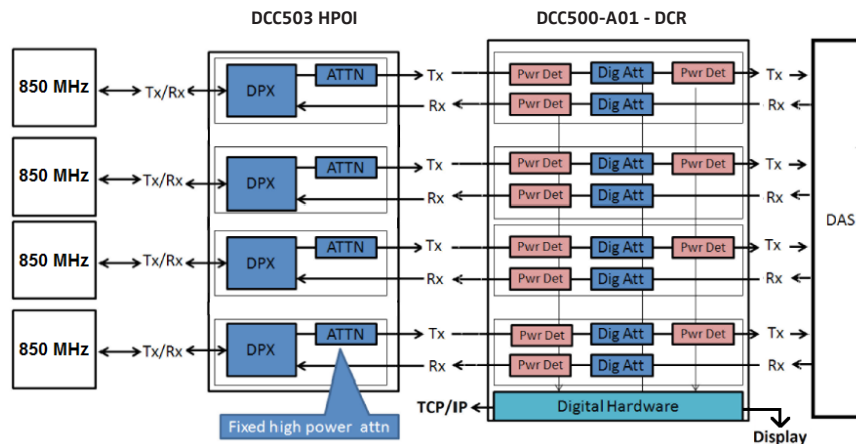

Note: Specifications are subject to change without prior notification.

28SEP2015